

**BUILT**  
SYSTEMS

**PRODUCT  
SPECS**

# HEAVY-DUTY CONVEYOR

ELECTRIC HEIGHT ADJUSTABLE



## LOAD CAPACITY

1200 lbs

## STANDARD SIZES

Starting height: 34.6" (12" stroke)

Depths: 30" | 36"

Lengths: 84"

## STANDARD COLORS

 RAL 9003 - Signal White

 RAL 7037 - Dusty Grey

 OB07 - Matte Black

## CUSTOMIZATION

Custom Sizes, Color  
and Branding available

## STABILITY

Rigid cold-rolled steel construction

6" swivel casters

Removeable lower cross tubes

Fully welded frame

## TECHNICAL

# HEAVY-DUTY CONVEYOR



### CASTERS

6 in Swivel With Brake  
(Rigid Casters Optional)

Polyurethane -  
Shore A 80 Durometer

1100 lbs Capacity Each

### ROLLERS

Galvanized Steel Rollers

1.9 in diameter

### ACTUATORS

Standard 12 in or Custom 16 in  
Linear Actuators (Bolt-On)


IP66 Rated

Speed - 6.3 mm/Second  
(1/4 in/Second) @ Zero Load

3.5 mm/Second  
(9/64 in/Second) @ Max Load

1000 lbs Maximum Weight Capacity  
(Evenly Distributed)

Mechanical Brake Spindle Nut For  
Redundant Protection

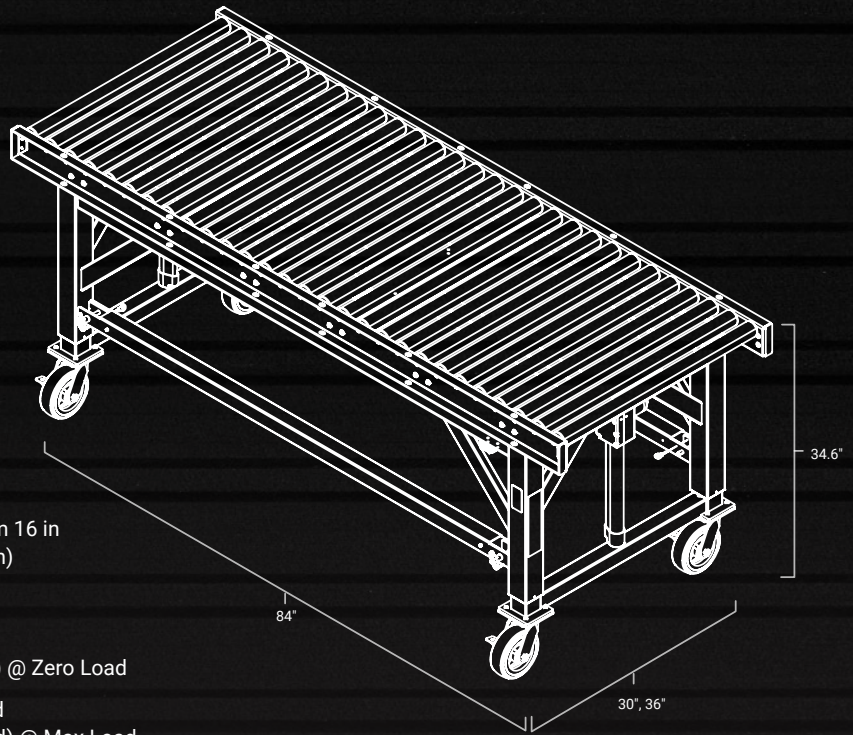

## MECHANICAL SPECS

Carbon Steel (ASTM-A513) Construction including:

- 3 in x 2 in 11 ga Depth Tubes
- 2 in Square 12 ga Lower Tubes
- 8 ga MIG Welded Modular Brackets - M8 Tapped Holes
- 70 mm Square Vertical Telescoping Columns
- Patented Telescoping Glide System
- Custom Fit For Each Column During Assembly
- 1/2 in Thick Column Top Mount Pads
- Column Centered M10 Tapped Holes
- 3/8 in Thick MIG Welded M10 Tapped Caster Plates
- 6 in x 3 in x 1/8 in MIG Welded Fork Tube Targets

*Specifications may vary based on system configuration and workload.*